



US010085337B2

(12) **United States Patent**  
**Fisné et al.**

(10) **Patent No.:** **US 10,085,337 B2**  
(45) **Date of Patent:** **Sep. 25, 2018**

(54) **COAXIAL CABLE ASSEMBLY,  
ELECTRONIC PACKAGE AND CONNECTOR**

USPC ..... 333/33, 34, 238, 245, 246, 260  
See application file for complete search history.

(71) Applicant: **INSTITUT NATIONAL D'OPTIQUE,**  
Québec (CA)

(56) **References Cited**

(72) Inventors: **Christophe Fisné,** Reims (FR); **Alex Paquet,** Québec (CA); **Bruno Fiset,** Saint-Augustin-de-Desmaures (CA)

U.S. PATENT DOCUMENTS

6,661,318 B2 \* 12/2003 Tamaki ..... H01P 5/085  
333/260  
6,674,347 B1 \* 1/2004 Maruhashi ..... H01P 3/003  
333/161

(73) Assignee: **INSTITUT NATIONAL D'OPTIQUE,**  
Quebec (CA)

(Continued)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 96 days.

OTHER PUBLICATIONS

Brock J. Lameris et al., Novel 3-D Coaxial Interconnect System for Use in System-in-Package Applications, IEEE Transactions on Advanced Packaging, Feb. 2010, pp. 37-47, vol. 33, No. 1, Montana.

(21) Appl. No.: **15/165,489**

*Primary Examiner* — Stephen E Jones

(22) Filed: **May 26, 2016**

(74) *Attorney, Agent, or Firm* — Norton Rose Fulbright Canada LLP; Alexandre Daoust

(65) **Prior Publication Data**

US 2017/0347446 A1 Nov. 30, 2017

(57) **ABSTRACT**


(51) **Int. Cl.**  
**H01P 5/08** (2006.01)  
**H05K 1/02** (2006.01)  
**H01P 3/08** (2006.01)  
**H01L 23/057** (2006.01)  
**H01L 23/66** (2006.01)  
**H01R 9/05** (2006.01)

The coaxial cable assembly generally has a coaxial cable; and a connector assembled to an end of the coaxial cable, the connector having a dielectric body having a connecting surface, a longitudinal groove recessed in the connecting surface and having a groove end spaced from an edge of the connecting surface, and a coplanar waveguide along the connecting surface, the coplanar waveguide having a signal conductor extending from the groove end to the edge and between ground conductors each extending from a respective lateral side of the longitudinal groove to the edge; the end of the coaxial cable being received in the longitudinal groove and having an inner conductor electrically connected to the signal conductor and an outer conductor electrically connected to the ground conductors in a manner allowing connection of the coaxial cable with another coplanar waveguide of an integrated circuit.

(52) **U.S. Cl.**  
CPC ..... **H05K 1/0243** (2013.01); **H01L 23/057** (2013.01); **H01L 23/66** (2013.01); **H01P 3/08** (2013.01); **H01P 5/08** (2013.01); **H01P 5/085** (2013.01); **H01R 9/0515** (2013.01); **H01L 2223/6627** (2013.01); **H01L 2223/6683** (2013.01); **H01L 2223/6694** (2013.01)

(58) **Field of Classification Search**  
CPC .... H01P 3/08; H01P 3/081; H01P 5/08; H01P 5/085

**13 Claims, 6 Drawing Sheets**

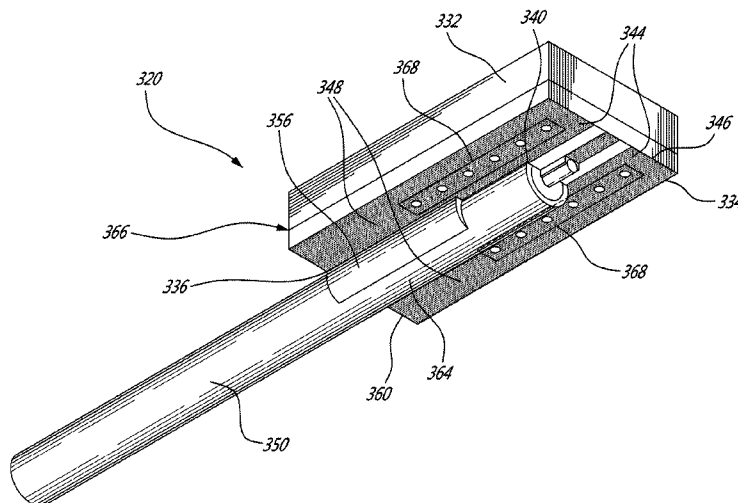


(56)

**References Cited**

U.S. PATENT DOCUMENTS

6,927,655	B2 *	8/2005	Torigoe .....	G02B 6/4201
				333/260
2007/0126524	A1 *	6/2007	Yagisawa .....	H05K 1/0219
				333/33

\* cited by examiner

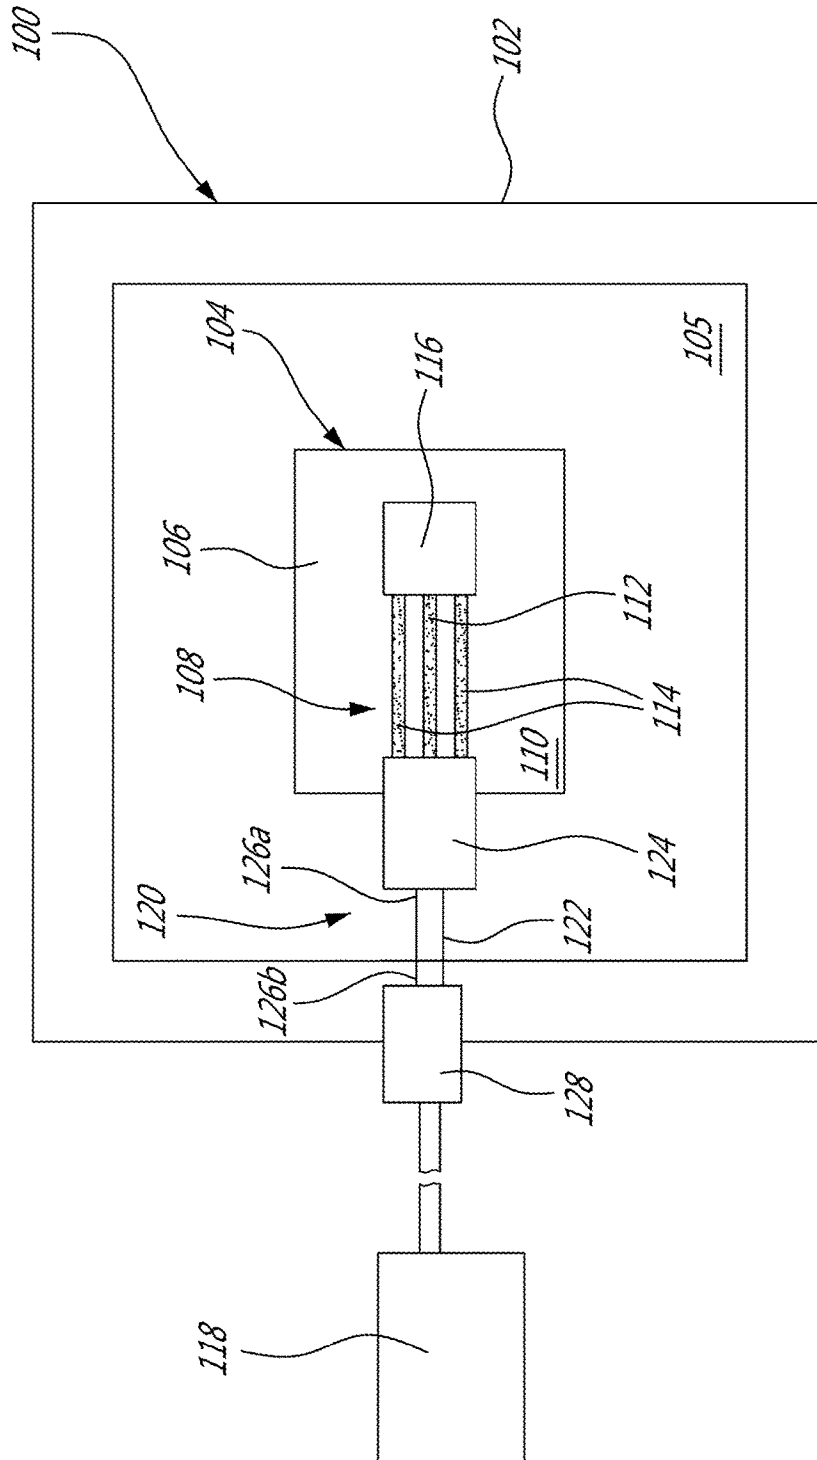

**FIG. 1**

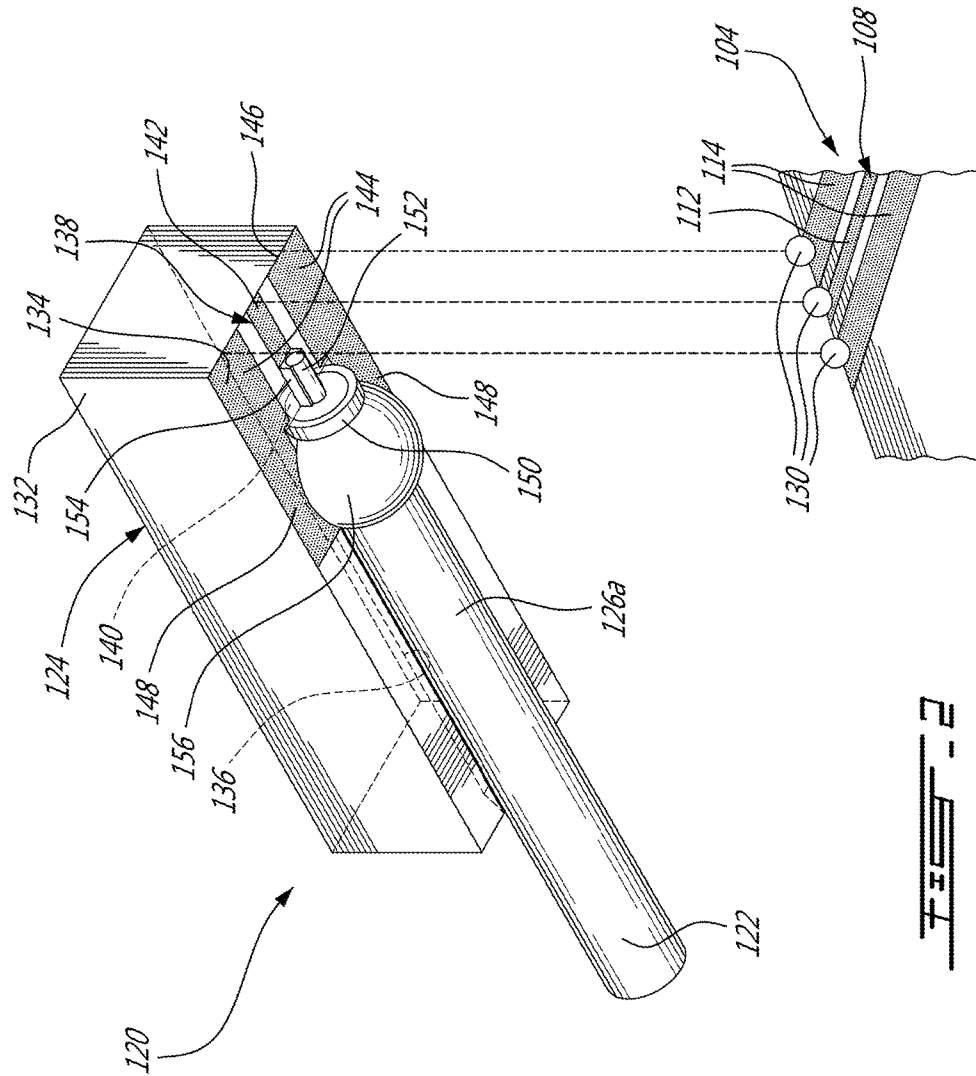
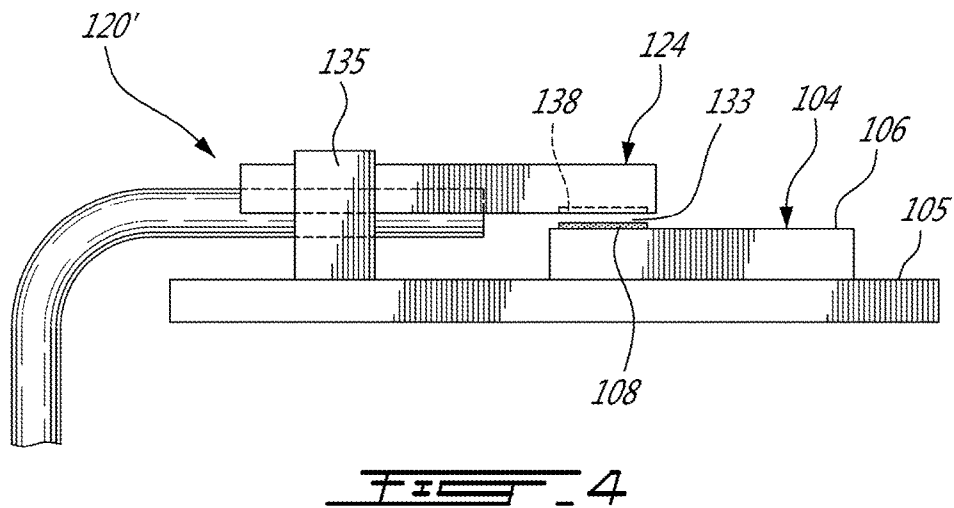
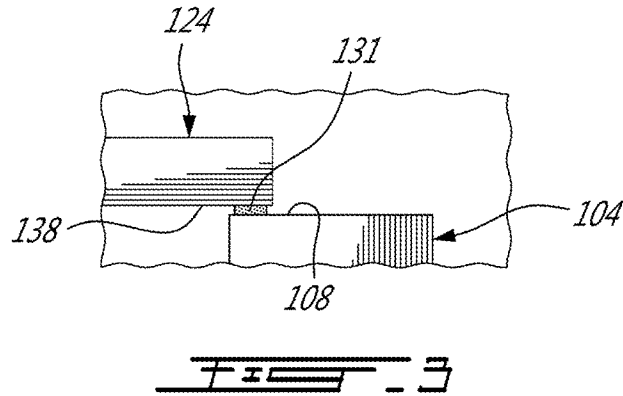


FIG. 2



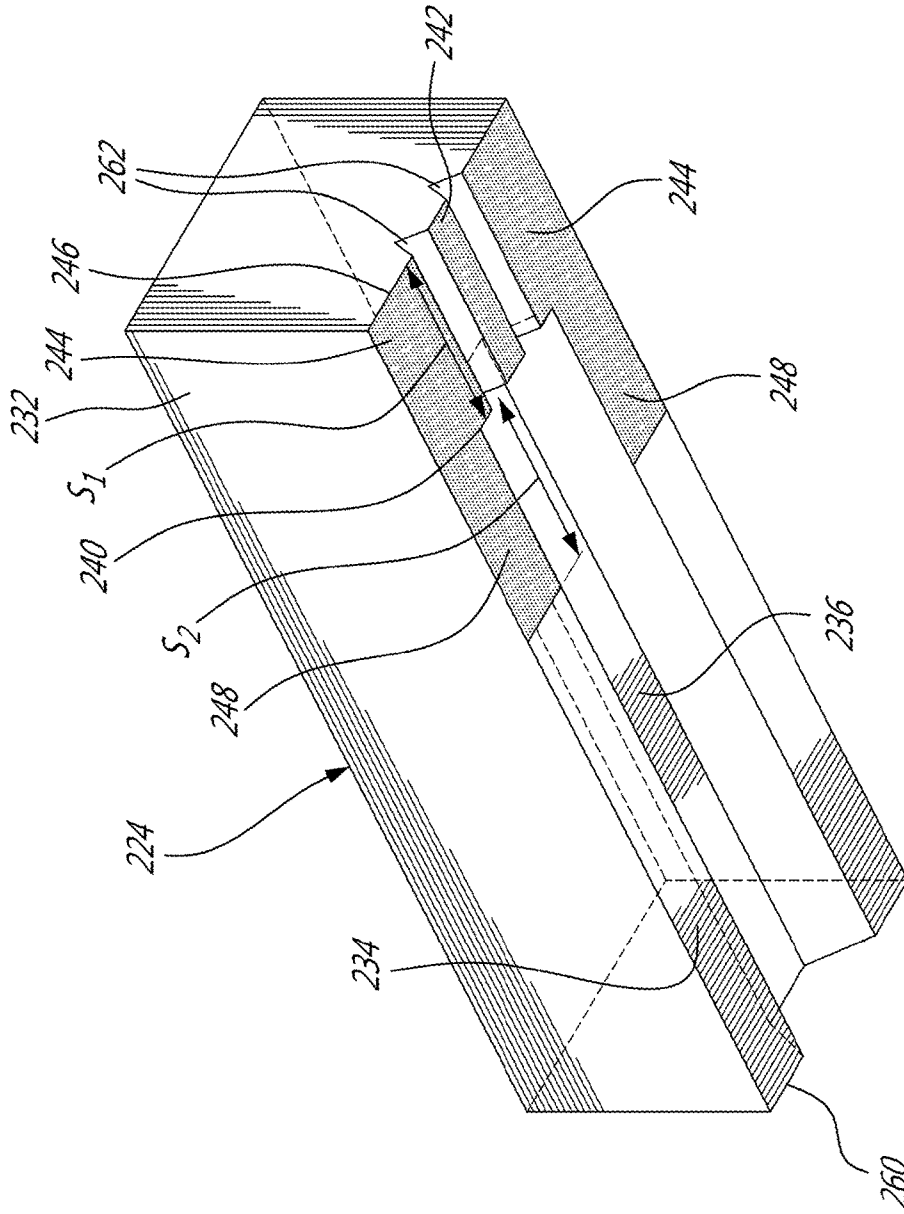
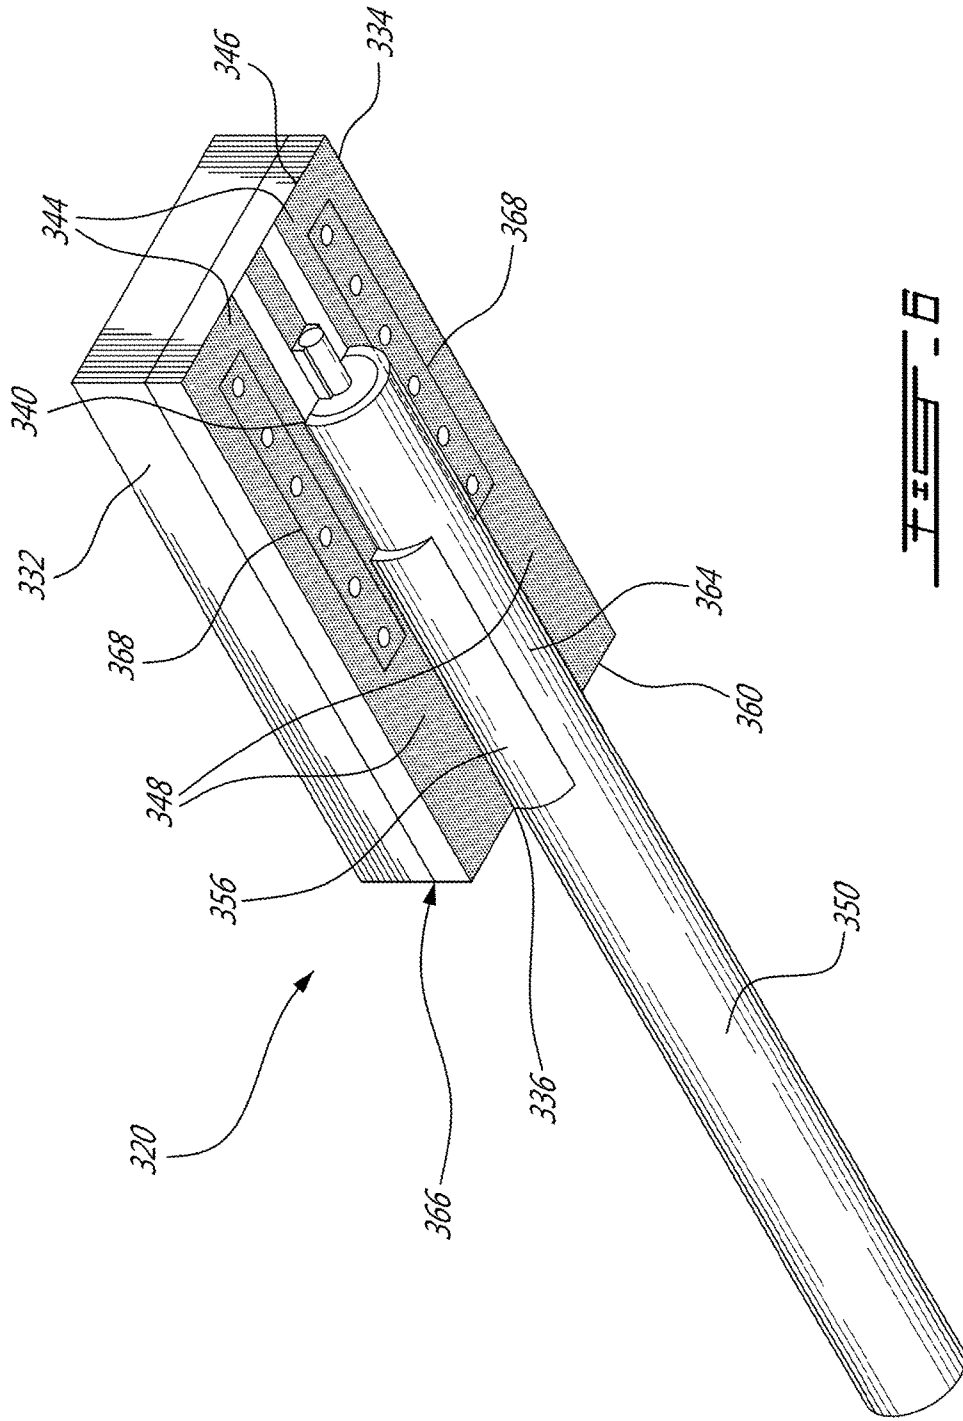


FIG. 5



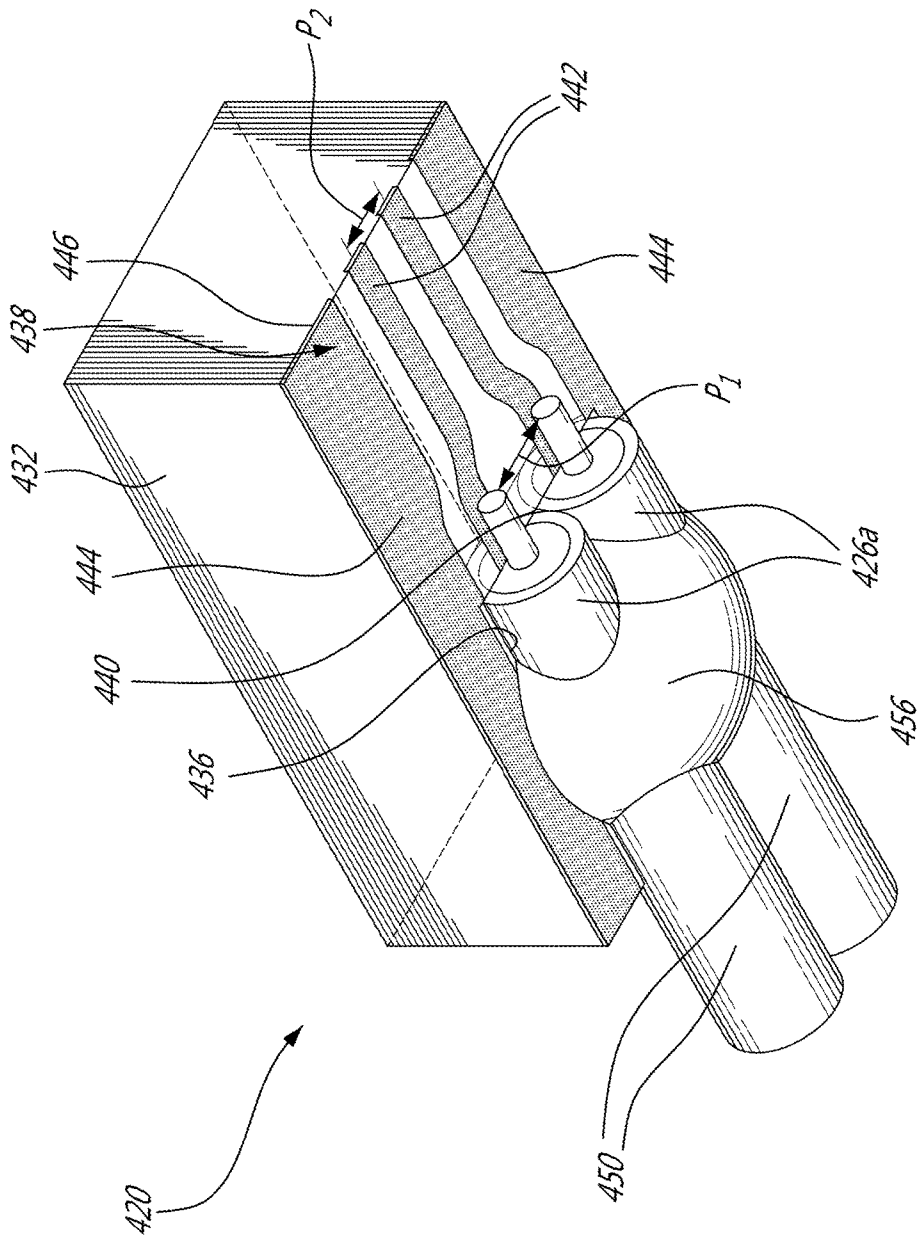


FIG. 7



1

## COAXIAL CABLE ASSEMBLY, ELECTRONIC PACKAGE AND CONNECTOR

### FIELD

This disclosure relates to system-in-package applications and more particularly relates to system-in-package applications involving integrated circuits such as photonic integrated circuits and/or electronic integrated circuits.

### BACKGROUND

System-in-a-package (SiP) devices generally involve a number of integrated circuits enclosed in an electronic package.

In some applications, it can be desired to connect electrical signal carriers to an integrated circuit. For instance, an electrical signal can be sent from one integrated circuit to another via a technique known as wire bonding, which requires soldering wires to the integrated circuits.

Although existing wire bonding techniques are satisfactory to a certain degree, there remains room for improvement, such as in radiofrequency/microwave applications in which wire bonding leads to undesirable signal losses.

### SUMMARY

There is provided a connector which can be made integral to an end of a coaxial cable and can be used to connect the coaxial cable to an integrated circuit in a flip-chip connection.

In accordance with one aspect, there is provided a coaxial cable assembly comprising: at least one coaxial cable, each coaxial cable having an end for connection to an integrated circuit; and a connector assembled to the end of each of the at least one coaxial cable, the connector having a dielectric body having a connecting surface, at least one longitudinal groove recessed in the connecting surface and having a groove end spaced from an edge of the connecting surface, and a coplanar waveguide extending at least partially along the connecting surface up to the edge, the coplanar waveguide having at least one signal conductor positioned between and separated from ground conductors; each end of the at least one coaxial cable being received in the at least one longitudinal groove, each end having an inner conductor electrically connected to a corresponding one of the at least one signal conductor and an outer conductor electrically connected to the ground conductors, the coplanar waveguide being connectable to another coplanar waveguide of the integrated circuit.

In accordance with another aspect, there is provided an electronic package comprising: a housing; an integrated circuit enclosed in the housing and having a substrate and a first coplanar waveguide on a surface of the substrate; at least one coaxial cable each having an end exposing an outer conductor and an inner conductor for connection to the integrated circuit; and a connector assembled to the end of each coaxial cable, the connector having a dielectric body having a connecting surface, at least one longitudinal groove recessed in the connecting surface and having a groove end spaced from an edge of the connecting surface, and a second coplanar waveguide along the connecting surface, the second coplanar waveguide having at least one signal conductor extending from each groove end to the edge and ground conductors each extending from a respective lateral side of the at least one longitudinal groove to the edge, the at least one signal conductor extending between the ground conduc-

2

tors; the end of each of the at least one coaxial cable being received in the at least one longitudinal groove, the inner conductor of each of the at least one coaxial cable being electrically connected to a corresponding one of the at least one signal conductor, the outer conductor being electrically connected to the ground conductors, the first coplanar waveguide being connected to the second coplanar waveguide in a manner allowing waveguiding of a radiofrequency/microwave signal back and forth between the at least one coaxial cable and the first coplanar waveguide via the second coplanar waveguide.

In accordance with another aspect, there is provided a connector for use in connecting at least one coaxial cable to an integrated circuit, the connector comprising a dielectric body having a connecting surface, at least one longitudinal groove recessed in the connecting surface and having a groove end spaced from an edge of the connecting surface, and a coplanar waveguide having at least one signal conductor extending from the groove end to the edge and ground conductors each extending from a respective lateral side of the at least one longitudinal groove to the edge, the at least one signal conductor extending between and separated from the ground conductors; wherein, during use, each end of the at least one coaxial cable is received in the at least one longitudinal groove, each end of the at least one coaxial cable having an inner conductor being electrically connected to a corresponding one of the at least one signal conductor and an outer conductor being electrically connected to the ground conductors, and the coplanar waveguide of the connector being connected to another coplanar waveguide of the integrated circuit.

It was found that use of the connector can avoid a step of machining and/or etching a groove on the substrate of the integrated circuit. The connector can be designed so as to fit with any integrated circuit and any pad configuration thereof. In some embodiments, the connector may have a low insertion loss (e.g. below 0.4 dB inside the electronic package) and may be operated with high-bandwidth signals (e.g. from DC to 50 GHz).

Many further features and combinations thereof concerning the present improvements will appear to those skilled in the art following a reading of the instant disclosure.

### DESCRIPTION OF THE FIGURES

In the figures,

FIG. 1 is a schematic top view of an example of an electronic package including an integrated circuit and a coaxial cable assembly;

FIG. 2 is an exploded view of an example embodiment of a coaxial cable assembly of FIG. 1;

FIG. 3 is a partial side elevation view of another example of a connector shown connected to an integrated circuit;

FIG. 4 is a side elevation view of an example of a coaxial cable assembly electromagnetically coupled to an integrated circuit via a dielectric spacer including an air gap;

FIG. 5 is an oblique view, taken from below, of an example of a connector;

FIG. 6 is an oblique view, taken from below, of another example of a coaxial cable assembly including a coaxial cable and a connector having via fences; and

FIG. 7 is an oblique view, taken from below, of another example of a coaxial cable assembly including two coaxial cables and a connector adapted to receive each end of the two coaxial cables.

### DETAILED DESCRIPTION

FIG. 1 is a schematic top view of an example of an electronic package **100** having a housing **102** enclosing an

integrated circuit **104** (e.g., a photonic integrated circuit and/or an electronic integrated circuit). In this example, the integrated circuit **104** may be disposed on a printed circuit board (PCB) **105**.

As depicted in this embodiment, the integrated circuit **104** has a substrate **106** and a first coplanar waveguide **108** on a surface **110** of the substrate **106**. The first coplanar waveguide **108** has a signal conductor **112** and two ground conductors **114** extending along either side of the signal conductor **112**.

As it will be understood, the first coplanar waveguide **108** is configured and adapted to guide a radiofrequency/microwave (RF/MW) signal either from or towards one or more devices **116** of the integrated circuit **104**. The RF/MW signal can be communicated between the integrated circuit **104** and an external device **118** (e.g., a radio (transmitter and/or receiver), a computer, a signal processor, a detector or a modulator via at least a coaxial cable assembly **120**.

The coaxial cable assembly **120** includes a coaxial cable **122** and a connector **124** assembled to an end **126a** of the coaxial cable **122**. As it will be described below, the connector **124** is used to electrically connect the end **126a** of the coaxial cable **122** to the first coplanar waveguide **108** of the integrated circuit **104**.

In this illustrated example, the coaxial cable **122** has another end **126b**, opposite to the end **126a**, which has a connector **128** mounted on the housing **102** of the electronic package **100**. The external connector **128** can be provided in the form of a coaxial connector, a GPPO connector, a series of pins, a grid array, or any other suitable type of connector.

In another embodiment, two integrated circuits enclosed in a single electronic package can be connected together using a coaxial cable assembly having connectors at both ends. In an alternate embodiment, two integrated circuits enclosed in two distinct electronic packages can be connected together using a coaxial cable assembly having connectors at both ends. Other types of electronic packages can be provided.

FIG. 2 shows an exploded view of the coaxial cable assembly **120** placed above and in vertical alignment with the end portion of the first coplanar waveguide **108** of the integrated circuit **104**. As depicted, the end **126a** of the coaxial cable **122** is assembled to the connector **124**.

As depicted, the connector **124** has a dielectric body **132** having a connecting surface **134**. The dielectric body **132** has a longitudinal groove **136** which is recessed in the connecting surface **134** and which extends along a portion of the connecting surface **134** to terminate at an end **140** of the longitudinal groove (referred to as “the groove end **140**”) spaced from an edge **146** of the connecting surface **134**. The dielectric body **132** has a second coplanar waveguide **138** having a signal conductor **142** extending from the groove end **140** up to the edge **146** and two ground conductors **144** each located on a respective lateral side **148** of the longitudinal groove **136** and extending up to the edge **146** of the connecting surface **134**. As shown, the signal conductor **142** is located between the two ground conductors **144**. The longitudinal groove can be etched (e.g., KOH wet etched on silicon) or machined in the dielectric body **132**.

As it will be understood, the second coplanar waveguide **138** is designed such as to match the impedance between the coaxial cable **122** and the first coplanar waveguide **108** of the integrated circuit **104**. In other words, the second coplanar waveguide **138** is designed to limit reflection and/or radiation of the RF/MW signal along the connector during use thereof.

As shown, the end **126a** of the coaxial cable **122** has an outer conductor **150** and an inner conductor **152** protruding from the unstripped portion of the cable **122**. As shown in this example, the outer conductor **150** is received in the longitudinal groove **136** in a manner that the inner conductor **152** protrudes from the groove end **140**, e.g., over a length of about 1 mm. An adhesive can be used to adhere the end **126a**, or more specifically the outer conductor **150**, to the longitudinal groove **136**. The adhesive is optional. In this example, the adhesive is heat-resistant. Still alternately, in other embodiments, the electrical connection function and the mechanical connection function can be partially or fully dissociated. For instance, an adhesive (electrically conductive or not) can be used in addition to soldering in order to strengthen the intrinsic mechanical bond of the soldering. In another example, ductile stud bumps can be compressed to perform the electrical connection function, and an adhesive or a solder can be used to perform a mechanical connection function.

The protruding inner conductor **152** is electrically connected to the signal conductor **142**, and the outer conductor **150** is electrically connected to the two ground conductors **144**. In this case, the inner conductor **152** is soldered to the signal conductor **142** via a first solder joint **154**, and the outer conductor **150** is soldered to the two ground conductors **144** via a second solder joint **156**. An electrically conductive adhesive can be used to electrically connect the conductors of the coaxial cable **122** to corresponding conductors of the second coplanar waveguide **138**.

As shown in this example, the second coplanar waveguide **138** has a waveguide end, proximate to the edge **146** of the connecting surface **134**, that is connectable to the first coplanar waveguide **108** of the integrated circuit **104**. As it will be understood, the second coplanar waveguide **138** of the connector **124** can be connected to the first coplanar waveguide **108** of the integrated circuit **104** via an electrical connection using solder bumps **130** such as shown in FIG. 2 or using an electrically conductive adhesive **131** such as shown in FIG. 3. It will be understood that the manner the solder bumps **130** shown in the example of FIG. 2 are used is analogous to that encountered in conventional flip-chip bonding techniques.

When the coaxial cable assembly **120** is connected to the integrated circuit **104**, the signal conductor **112** of the first coplanar waveguide **108** is soldered to the signal conductor **142** of the second coplanar waveguide **138** using a solder bump **130**, and each of the two ground conductors **114** of the first coplanar waveguide **108** is soldered to a respective one of the two ground conductors **144** of the second coplanar waveguide **138** using respective solder bumps **130**.

As it will be understood, in another embodiment, the second coplanar waveguide of the connector can be connected to the first coplanar waveguide of the integrated circuit **104** via an electromagnetic connector (that will be referred to as “electromagnetic coupling”) when using a dielectric spacer (e.g., dielectric adhesive, dielectric layer, air gap) between the two coplanar waveguides. When such a dielectric spacer is used, the second coplanar waveguide can be said to be electromagnetically coupled to the first coplanar waveguide and be applicable in the low frequency range, for instance.

FIG. 4 shows an example of a coaxial cable assembly **120** where a dielectric spacer **133** including an air gap is provided between the first coplanar waveguide **108** of the integrated circuit **104** and the second coplanar waveguide **138** of the connector **124**. The integrated circuit **104** is disposed on the PCB **105**. As depicted in this example, the

connector **124** is mounted on the PCB **105** via a support structure **135** which maintains the second coplanar waveguide **138** vertically spaced from the first coplanar waveguide **108** by the dielectric spacer **133** while maintaining the waveguides **108** and **138** in proper vertical alignment. As it will be understood, the dielectric spacer **133** allows waveguiding of a radiofrequency/microwave signal back and forth between the first coplanar waveguide **108** and the second coplanar waveguide **138**.

FIG. **5** is an oblique view taken from below of another example of a connector **224**. The connector **224** is described such that like elements bear like reference numerals, but in the 200-series instead of the 100-series.

The connecting surface **234** has a first edge **260** and a second edge **246** opposite to the first edge **260**. The longitudinal groove **236** extends from the first edge **260** along a portion of the connecting surface **234** up to the groove end **240**, thus leaving a first spacing distance  $s_1$  between the groove end **240** and the second edge **246**. The signal conductor **242** extends along the first spacing distance  $s_1$ , from the groove end **240** up to the second edge **246**. As shown, the first spacing distance  $s_1$  is long enough to allow the signal conductor **242** to be connectable to the inner conductor of the coaxial cable and to the signal conductor of the integrated circuit.

Each of the two ground conductors **244** extends from a respective lateral side **248** of the longitudinal groove **236** up to the second edge **246**. More specifically, the ground conductors **244** extend only along a given portion of the lateral sides **248** of the longitudinal groove **236**. The ground conductors **244** thus extend forwardly from the groove end **240** along the first spacing distance  $s_1$  and rearwardly from the groove end **240** along a second spacing distance  $s_2$ . The second spacing distance  $s_2$  is long enough to allow the two ground conductors **244** to be connectable to the outer conductor of the coaxial cable. In this example, the conductors **242** and **244** are adapted to be connected to 100- $\mu$ m pads of the integrated circuit.

In this embodiment, the longitudinal groove **236** is a truncated V-groove. However, any other suitable longitudinal groove can be used. For instance, a V-groove, a U-groove or any other equivalent structure can be used to secure the corresponding end of the coaxial cable.

Still referring to the embodiment of FIG. **5**, the dielectric body **232** has a longitudinal recess **262** formed in the connecting surface **234** on either side of the signal conductor **242**. Each longitudinal recess **262** has a V-shaped cross-section in this example, but other types of recess can be used as well.

In the illustrated example, the dielectric body **232** has a rectangular prism shape, and the connecting surface **234** is rectangular. However, it is noted that the body can have any other suitable shape, e.g., any parallelepipedic shape or any prismatic shape.

FIG. **6** is another example of a coaxial cable assembly **320**. The coaxial cable assembly **320** is described such that like elements bear like reference numerals, but in the 300-series instead of the 100-series.

As depicted, the two ground conductors **344** extend along the entire length of the connecting surface **334**, along each lateral side **348** of the longitudinal groove **336** and from the first edge **360** to the second edge **346**. In this example, a portion **364** of the outer conductor **350** is soldered to the two ground conductors **344** using a second solder joint **356**. As it can be seen, the second solder joint **356** is elongated in this example.

Moreover, the dielectric body **332** has an inner conductive layer **366** spaced from and parallel to the connecting surface **334**. In this embodiment, the inner conductive layer **366** and the two ground conductors **344** are electrically connected through two via fences **368**. The inner conductive layer **366** can improve the electrical isolation of the propagation of the RF/MW signal. The via fences **368** can improve the propagation of the RF/MW signal. Each via fence **368** extends along a respective ground conductor **344**, from a portion of the second solder joint **356** up to the second edge **346**. The via fences **368** can help to guide the RF/MW signal from the coaxial cable to the integrated circuit.

In the examples described above, the connector has a longitudinal groove adapted for receiving an end of a single coaxial cable. In another embodiment, the connector has a single longitudinal groove adapted for receiving two or more adjacent ends of two or more corresponding coaxial cables. In an alternate embodiment, the connector has two or more spaced-apart longitudinal grooves, each being adapted to receive a respective end of a respective coaxial cable. When the connector is configured to receive two or more ends, the coplanar waveguide of such connector has a signal conductor for each end.

FIG. **7** shows another example of a coaxial cable assembly **420**. The coaxial cable assembly **420** is described such that like elements bear like reference numerals, but in the 400-series instead of the 100-series.

As it can be seen, the coaxial cable assembly **420** has a longitudinal groove **436** which is sized and shaped to receive two adjacent ends **426a**. The second coplanar waveguide **438** is adapted such that each end **426a** has its respective signal conductor **442**. The second coplanar waveguide **438** thus has two signal conductors **442** and two ground conductors **444**. Both coaxial cables have signal conductors connected to respective signal conductors of the coplanar waveguide, whereas the outer conductors **450** of the coaxial cables both connect to the same two ground conductors **444**.

In this embodiment, the outer conductors **450** of the coaxial cables are both connected to the two ground conductors **444** via the solder joint **456**.

As it can be seen, the two adjacent ends **426a** of the coaxial cables are spaced from one another by a first pitch  $p_1$ . Therefore, the two signal conductors **442** are spaced from one another by the first pitch  $p_1$  proximate to the groove end **440**. In this embodiment, the coaxial cable assembly **420** is adapted for connection to a first coplanar waveguide of an integrated circuit characterized by a second pitch  $p_2$ , smaller than the first pitch  $p_1$ . In this case, the second coplanar waveguide **438** is adapted to reduce the first pitch  $p_1$  to the second pitch  $p_2$  along its length. The two signal conductors **442** each have a curved portion curving towards one another so that proximate to the edge **446**, the two signal conductors **442** are spaced from one another by the second pitch  $p_2$ . In an alternate embodiment, the second coplanar waveguide is adapted such that the pitch increases along the path from the groove end **440** up to the edge **446** of the connecting surface.

The connectors shown in FIGS. **2**, **5** and **6** can be characterized by having a Ground-Signal-Ground (GSG) conductor configuration, and the connector shown in FIG. **7** can be characterized by having a Ground-Signal-Signal-Ground (GSSG) conductor configuration. As it will be understood, other embodiments of the connector can have different conductor configurations such as a GSGSG conductor configuration (with a common center ground conductor located between two adjacent signal conductors) or any other suitable conductor configuration. It is noted that the conductor configuration can be adapted to any conductor

configuration of the coplanar waveguide of the integrated circuit, and to any pads thereof.

It is contemplated that, in some embodiments, the connector has one, two or more longitudinal groove(s), and that each longitudinal groove of such a connector is sized and shaped to receive one, two or more end(s) of corresponding coaxial cable(s).

The dielectric body of the connector can be wholly made or partially made of a dielectric material. For instance, the electrical insulator can include silicon, alumina (Al<sub>2</sub>O<sub>3</sub>), nitride of aluminum (AlN), quartz (SiO<sub>2</sub>), ceramic (HTCC, LTCC) and/or any other suitable electrical insulator material. Preferably, the electrical insulator is heat-resistant so that a soldering step performed on the second coplanar waveguide causes minimal or no damage to the body. The body can have a parallelepipedic shape. Any other suitable shape can also be used.

In an embodiment, the coaxial cable is a Micro-coax® model "UT-013" cable having an outer conductor with a diameter of 330 μm and an inner conductor with a diameter of 78.7 μm. Other examples of coaxial cables include the Micro-coax® model "UT-020" or "UT-047" and the Paster-nack® model "PE-020SR". Any suitable type of coaxial cable can be used.

A method of manufacturing a connector is provided. For instance, the method of manufacturing has a step of providing a dielectric body having a connecting surface. The method has a step of making at least one longitudinal groove along a portion of the connecting surface such as to define a groove end spaced from an edge of the connecting surface. The step of making can include machining the at least one longitudinal groove into the connecting surface and/or etching the at least one longitudinal groove into the connecting surface. The method has a step of providing a coplanar waveguide having a signal conductor extending from the groove end up to the edge of the connecting surface and two ground conductors, on either side of the signal conductor, from each lateral side of the longitudinal groove up to the edge of the connecting surface. The step of providing the coplanar waveguide can include metalizing the connecting surface along three spaced apart paths to form the signal and ground conductors. As it will be understood, many connectors can be manufactured on a single wafer. In this case, dicing can be required to obtain individual connectors from a single wafer.

A method of assembling a coaxial cable to a connector to provide a coaxial cable assembly is provided. For instance, the method of assembling includes a step of stripping an end of the coaxial cable such that the inner conductor is exposed over a given length. The method includes a step of providing the end of the coaxial cable into the longitudinal groove of the connector, with the end of the coaxial cable abutted on the groove end. The step of providing can include adhering the end of the coaxial cable to the longitudinal groove. The method has a step of electrically connecting both conductors of the coaxial cable to the conductors of the coplanar waveguide of the connector. More specifically, the step of electrically connecting includes connecting the inner conductor of the coaxial cable to the signal conductor of the coplanar waveguide and connecting the outer conductor of the coaxial cable to the two ground conductors of the coplanar waveguide of the connector. The step of electrically connecting can include soldering and/or adhering using an electrically conductive adhesive.

A method of connecting a coaxial cable assembly to an integrated circuit is provided. For instance, the method of connecting includes connecting the conductors of the copla-

nar waveguide of the connector to the corresponding conductors of the coplanar waveguide of the integrated circuit. The step of connecting can include electrically connecting via soldering (e.g., using solder balls, another form of flip-chip bonding such as ductile stud bumps) and/or via an adhesive. The step of connecting can also include electromagnetically coupling (or coupling) via a dielectric spacer (e.g., using a dielectric adhesive or an air gap). In still other embodiments, the connector structures can be used to connect two coaxial cables to one another.

As can be understood, the examples described above and illustrated are intended to be exemplary only. The scope is indicated by the appended claims.

What is claimed is:

1. A coaxial cable assembly comprising:

at least one coaxial cable, each coaxial cable having an end for connection to an integrated circuit; and

a connector assembled to the end of each of the at least one coaxial cable, the connector having a dielectric body having a connecting surface, at least one longitudinal groove recessed in the connecting surface and having a groove end spaced from an edge of the connecting surface, and a coplanar waveguide extending at least partially along the connecting surface up to the edge, the coplanar waveguide having at least one signal conductor positioned between and separated from ground conductors each extending from a respective lateral side of the at least one longitudinal groove to the edge, the dielectric body having an inner conductive layer extending parallel to the connecting surface, the coplanar waveguide including via fences each extending along a respective one of the ground conductors, at least a portion of each via fence running along and beside a corresponding portion of the longitudinal groove, each via fence electrically connecting the corresponding ground conductor to the inner conductive layer;

each end of the at least one coaxial cable being directly received in the at least one longitudinal groove, each end having an inner conductor electrically connected to a corresponding one of the at least one signal conductor and an outer conductor electrically connected to the ground conductors, the coplanar waveguide being connectable to another coplanar waveguide of the integrated circuit.

2. The coaxial cable assembly of claim 1 wherein the outer conductor of the end of each of the at least one coaxial cable is adhered to the at least one longitudinal groove.

3. The coaxial cable assembly of claim 1 wherein the inner conductor of the end of each of the at least one coaxial cable protrudes from the groove end and is in contact with the corresponding one of the at least one signal conductor of the coplanar waveguide.

4. The coaxial cable assembly of claim 1 wherein ends of the signal and ground conductors of the coplanar waveguide each has a solder bump soldered thereto for a flip chip connection with corresponding ends of the other coplanar waveguide of the integrated circuit.

5. The coaxial cable assembly of claim 1 wherein the outer conductor of each end of the at least one coaxial cable is electrically connected to the ground conductors via soldering and the inner conductor of each end of the at least one coaxial cable is electrically connected to a corresponding one of the at least one signal conductor via soldering.

6. An electronic package comprising:  
a housing;

an integrated circuit enclosed in the housing and having a substrate and a first coplanar waveguide on a surface of the substrate;

at least one coaxial cable each having an end exposing an outer conductor and an inner conductor for connection to the integrated circuit; and

a connector assembled to the end of each coaxial cable, the connector having a dielectric body having a connecting surface, at least one longitudinal groove recessed in the connecting surface and having a groove end spaced from an edge of the connecting surface, and a second coplanar waveguide along the connecting surface, the second coplanar waveguide having at least one signal conductor extending from each groove end to the edge and ground conductors each extending from a respective lateral side of the at least one longitudinal groove to the edge, the at least one signal conductor extending between the ground conductors, the dielectric body having an inner conductive layer extending parallel to the connecting surface, the second coplanar waveguide including via fences each extending along a respective one of the ground conductors, at least a portion of each via fence running along and beside a corresponding portion of the longitudinal groove, each via fence electrically connecting the corresponding ground conductor to the inner conductive layer;

the end of each of the at least one coaxial cable being directly received in the at least one longitudinal groove, the inner conductor of each of the at least one coaxial cable being electrically connected to a corresponding one of the at least one signal conductor, the outer conductor being electrically connected to the ground conductors, the first coplanar waveguide being connected to the second coplanar waveguide in a manner allowing waveguiding of a radiofrequency/microwave signal back and forth between the at least one coaxial cable and the first coplanar waveguide via the second coplanar waveguide.

7. The electronic package of claim 6 wherein the integrated circuit is a photonic integrated circuit.

8. The electronic package of claim 6 wherein another end of each of the at least one coaxial cable is mounted on the housing of the electronic package.

9. The electronic package of claim 6 wherein the first coplanar waveguide is electrically connected to the second coplanar waveguide.

10. The electronic package of claim 9 wherein the at least one signal conductor of the second coplanar waveguide is soldered to a corresponding signal conductor of the first coplanar waveguide and the ground conductors of the second coplanar waveguide are soldered to corresponding ground conductors of the first coplanar waveguide.

11. The electronic package of claim 6 wherein the first coplanar waveguide is electromagnetically coupled to the second coplanar waveguide.

12. The electronic package of claim 11 wherein the body of the connector is mounted on a printed circuit board via a support structure maintaining the second coplanar waveguide spaced from the first coplanar waveguide by a dielectric spacer, the dielectric spacer allowing waveguiding of the radiofrequency/microwave signal back and forth between the first coplanar waveguide and the second coplanar waveguide.

13. A connector for use in connecting at least one coaxial cable to an integrated circuit, the connector comprising a dielectric body having a connecting surface, at least one longitudinal groove recessed in the connecting surface and having a groove end spaced from an edge of the connecting surface, and a coplanar waveguide having at least one signal conductor extending from the groove end to the edge and ground conductors each extending from a respective lateral side of the at least one longitudinal groove to the edge, the at least one signal conductor extending between and separated from the ground conductors, the dielectric body having an inner conductive layer extending parallel to the connecting surface, the coplanar waveguide including via fences each extending along a respective one of the ground conductors, at least a portion of each via fence running along and beside a corresponding portion of the longitudinal groove, each via fence electrically connecting the corresponding ground conductor to the inner conductive layer; wherein, during use, each end of the at least one coaxial cable is directly received in the at least one longitudinal groove, each end of the at least one coaxial cable having an inner conductor being electrically connected to a corresponding one of the at least one signal conductor and an outer conductor being electrically connected to the ground conductors, and the coplanar waveguide of the connector being connected to another coplanar waveguide of the integrated circuit.

\* \* \* \* \*