




Yb-MCOF-35/250-56/400-07-2.2-T0.7-PM

Yb-doped large mode area tapered PM optical fiber

The Yb-MCOF tapered fiber is designed for M^2 lower than 1.2 making it the perfect choice for applications requiring superior beam quality. Our fiber design features a confined core for selective gain amplification and multi-layer cladding for enhanced suppression of higher order modes.

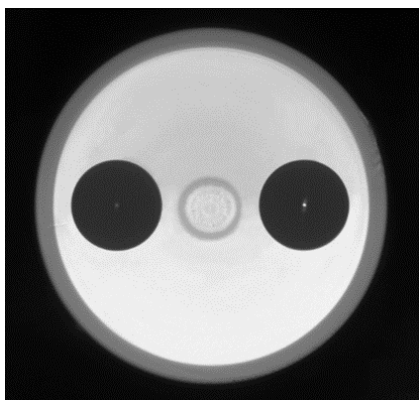

FEATURES

- Designed for output M^2 lower than 1.2
- Large core diameter
- Low photodarkening
- High birefringence
- Confined core for selective gain amplification

TYPICAL APPLICATIONS

- High Peak Power Lasers
- Ultrafast Amplifiers
- Frequency Conversion

OPTICAL PROPERTIES

Core NA	0.07 ± 0.01
Cladding NA	> 0.47
Pump guide absorption @ 915 nm	2.2 ± 0.5 dB/m
Nominal pump guide absorption @ 975 nm	8 dB/m
Birefringence	$\geq 1.4 \times 10^{-4}$
Beam quality factor M^2	< 1.2
PHYSICAL PROPERTIES	
Taper length	0.7 ± 0.2 m
Non-tapered sections length	> 1.0 m
Small core diameter	35 ± 3 μ m
Small cladding diameter	250 ± 10 μ m
Small coating diameter	500 ± 30 μ m
Large core diameter	56 ± 5 μ m
Large cladding diameter	400 ± 20 μ m
Large coating diameter	520 ± 30 μ m
Confined core	Yes
Depressed cladding	Yes